

## moduNet180: Repeater, novaNet system bus

### How energy efficiency is improved

SAUTER-EY-modulo2 – thoroughly tried-and-tested technology with a new design. For accurate control and regulation functions, 24 hours a day.

### Areas of application

Segment extension for long-distance novaNet networks for the EY-modulo 2 family and the EY3600 system.

### Features

- Device which physically extends the novaNet system bus
- Transparent repeater with four equal-authorized channels
- Three of the four channels have a connection for RS232 (optical waveguide, OWG)
- Incoming telegrams are amplified and forwarded
- Part of the SAUTER EY-modulo 2 system family

### Technical description

- Power supply: 24 V~/= or 230 V~
- Power consumption: 400 mA
- 4 channels with various connection possibilities for copper cables, 3 connections for OWG
- Delay time: ~20 µs for copper, ~25 µs for OWG
- 4 Send and Receive LEDs for each novaNet channel



### Products

Type	Description
EY-BU180F001	novaNet repeater, 24 V~/= or 230 V~

### Technical data

Electrical supply		Installation	
Power supply	24 V~/= ± 20% or 230 V~ ± 10%	Dimensions W x H x D (mm)	244 x 120 x 73
Power consumption	up to 11 VA	Weight (kg)	0.9
Dissipated power	up to 5 W	<b>Standards, guidelines and directives</b>	
<b>Communication</b>		Degree of protection	IP 00 (EN60529) 1)
Delay time	approx. 20 µs for novaNet approx. 25 µs for OWG	Protection class	I (EN60730-1)
Bus system		Environmental class	3K3 (IEC 60721)
novaNet	2-core, twisted 200 nF / 300 Ω	Over voltage category	II
Number of segments	4 for novaNet copper cable of which: 3 for OWG	CE conformity as per	
Power supply for		EMC Directive 2004/108/EC	EN 61000-6-1 EN 61000-6-2 <sup>2)</sup> EN 61000-6-3 EN 61000-6-4
E/O converter	+13 V= up to 100 mA	Low Voltage Directive	2006/95/EC
<b>Display</b>		<b>Additional information</b>	
LED		Fitting instructions	P100002329
Power	1x green	Material declaration	MD 96.020
novaNet (telegram traffic)	4x yellow - Send/Receive	Dimension drawing	<a href="#">M10496</a>
<b>Permitted ambient conditions</b>		Wiring diagram	<a href="#">A10542</a>
Operating temperature	0...45 °C		
Storage and transport temperature	-25...70 °C		
Humidity	10...85 % rh		
	no condensation		

1) Degree of protection IP10 with terminal cover (accessory 0900240001).

2) If it is mandatory to comply with the industrial standard (EN 61000-6-2), the connecting cables for the 13V voltage output must not exceed 30 m in length, and those for the RS232 interfaces must not be longer than 3 m.

### Accessories

Type	Description
	<b>General</b>
0900240001	Terminal cover (240 mm), pack of 2

**Engineering notes**

The moduNet180 repeater is available as a compact auxiliary unit. By means of a top-hat rail (EN 60715), it can be fitted in a cabinet (MCC) and is supplied with 24V alternating or DC voltage or with 230 V mains power.

When connecting an EY-AM300F001 to a 24 V power supply, an external, primary 2 A fuse ('slow-blow' type) must also be fitted.

A voltage of 13 V= is provided at terminal 02 to supply electrical/optical converters; the maximum load must not exceed 100 mA.

The following connection conditions must be met:

- Conductor cross-section, min. 0.8 mm<sup>2</sup>, max. 2.5 mm<sup>2</sup>, copper conductor compliant with standards and national installation regulations
- When the power supply is connected, it is mandatory to connect the protective earth to the terminal provided for this purpose
- Communication cabling must be undertaken correctly, must be separated from cabling carrying power, and must meet the requirements of standards EN 50174-1, EN 50174-2 and EN 50174-3.
- No account has been taken of special standards such as IEC/EN 61508, IEC/EN 61511, IEC/EN 61131-1 and IEC/EN 61131-2 or similar standards.
- Local standards regarding installation, application, access, access authorisations, accident prevention, safety, dismantling and disposal must be observed. Compliance is also required with installation standards EN 50178, 50310, 50110, 50274, 61140 and similar.
- For further information, consult the fitting instructions.

The repeater is fully transparent within the novaNet network, allowing passage of all telegrams without considering their address or direction. A total of 4-novaNet channels are available.

If a telegram enters one channel, it is forwarded to the other three channels. The signal is refreshed and amplified, but this delays it by a throughput time of approx. 20 µs for copper wires and 25 µs for OWG.

Each channel of the repeater places a load of 1 kΩ and 12 nF on the novaNet network.

Several connection options (terminals / plugs) are available for each channel, for a novaNet data line via copper cables (2-core, twisted and screened) with max. rating of 200 nF / 300 Ω.

Channels 2, 3 and 4 have additional connection terminals for a converter with a V24 interface (RS232C) for OWG transmission. Parallel operation of the same channel with copper cable and OWG is not permitted.

**LED displays**

The repeater has a total of 9 LED indicators:

- 1 green LED (Power) which lights up during operation.
- 4x 2 yellow LEDs for each novaNet channel; Send and Receive

**Network extension**

The following considerations are based on a screened standard cable (4 x 2 x 0.6mm) with the following electrical specifications:

Operating capacitance: 48 nF/km  
Loop resistance: <124 Ω/km

A novaNet network must keep to the following limits:

Total capacitance including all network participants: 200 nF  
Loop resistance: up to 300 Ω between any 2 AS

Each system bus component (automation station, router) places a load up to 0.6 nF on the novaNet.


**Application example**

- Step 1: Calculate total resistance:  
300 Ω / 124 Ω/km = 2.42 km line length
- Step 2: Calculate total capacitance:  
48 nF/km x 2.42 km = 116.16 nF  
200 nF - 116.16 nF = 83.84 nF  
83.84 nF / 0.6 nF/AS = 139.7 AS

One novaNet segment with a length of 2.42 km can therefore be assigned with a maximum of 139 automation stations according to the above example.


Conversely, the network length for 300 automation stations can be 400 m at most:

300x 0.6 nF = 180 nF  
200 nF - 180 nF = 20 nF 20 nF: 48 nF/km = 0.416 Km  
⇒ up to 400 m

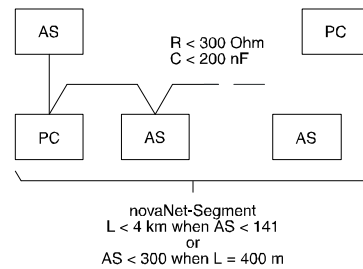

B05760a


If the maximum values (length / number of AS) are no longer respected in a novaNet network, the moduNet180 repeater must be used.

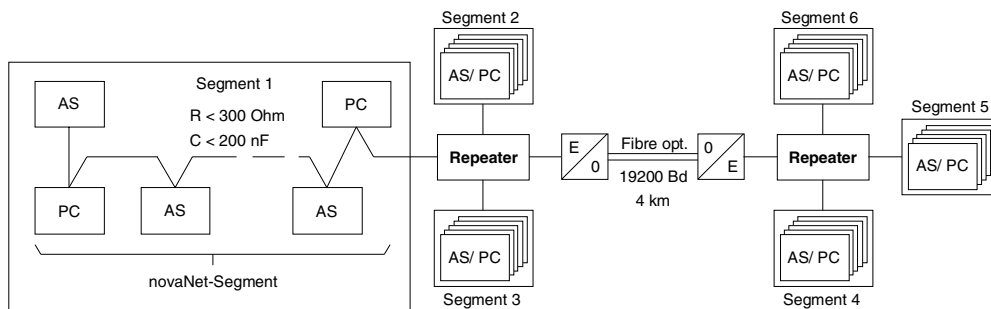

B05761b

**EY-BU180**


One novaNet segment can be built up on each channel of the repeater. It is possible to use the repeater as a "floor or building distributor". For this purpose, a bus (backbone) is built up on the back, consisting only of the moduNet180 repeater.

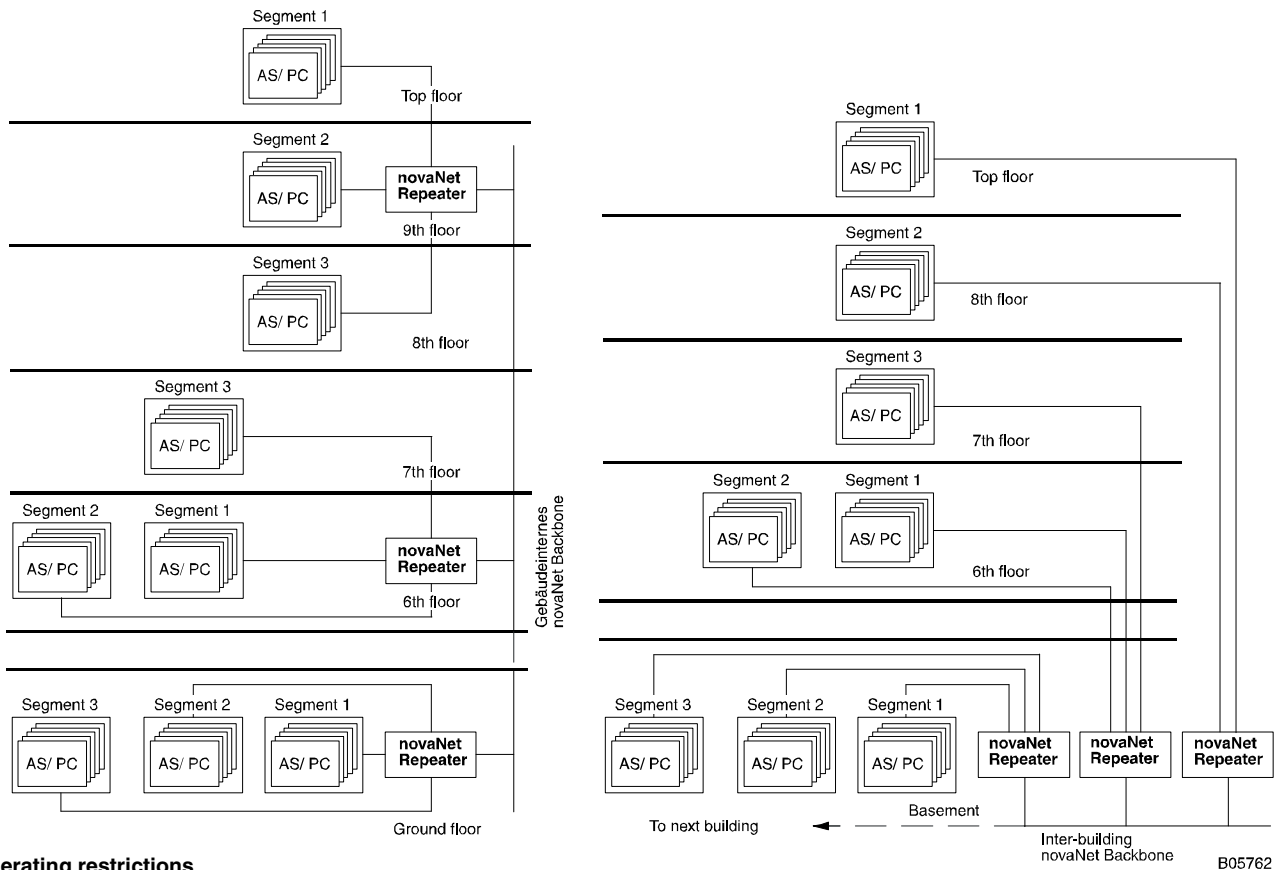

**Operating restrictions**


Due to the time delay, the path of a telegram must not pass through more than 3 repeaters, or a maximum of 4 repeaters provided that OWG is used for 2 connections.

- 1) 200 nF / 300 Ω
- 2) The repeaters on the PC side are located close to each other so that no additional delays occur during telegram traffic. Any automation stations connected in this building are usually connected directly to a repeater output (short distances).

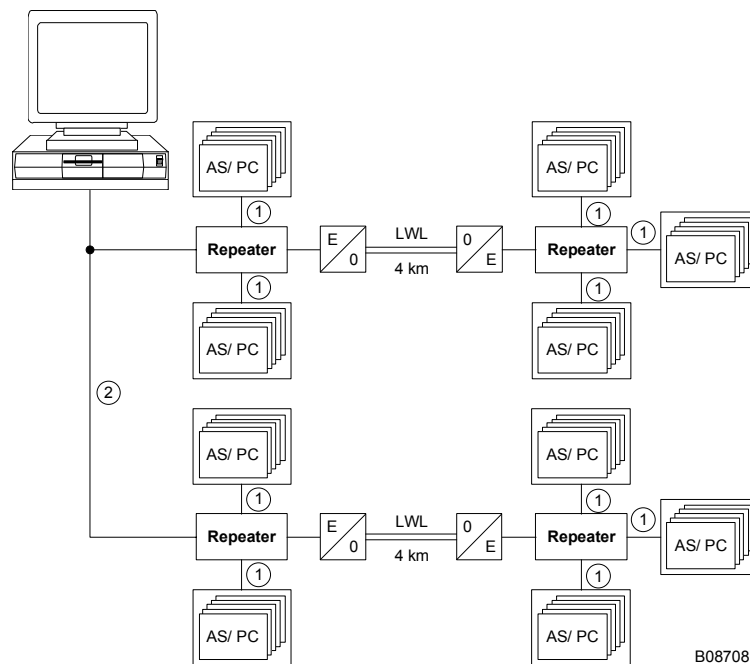

B08708

**Example of a simple backbone structure:**

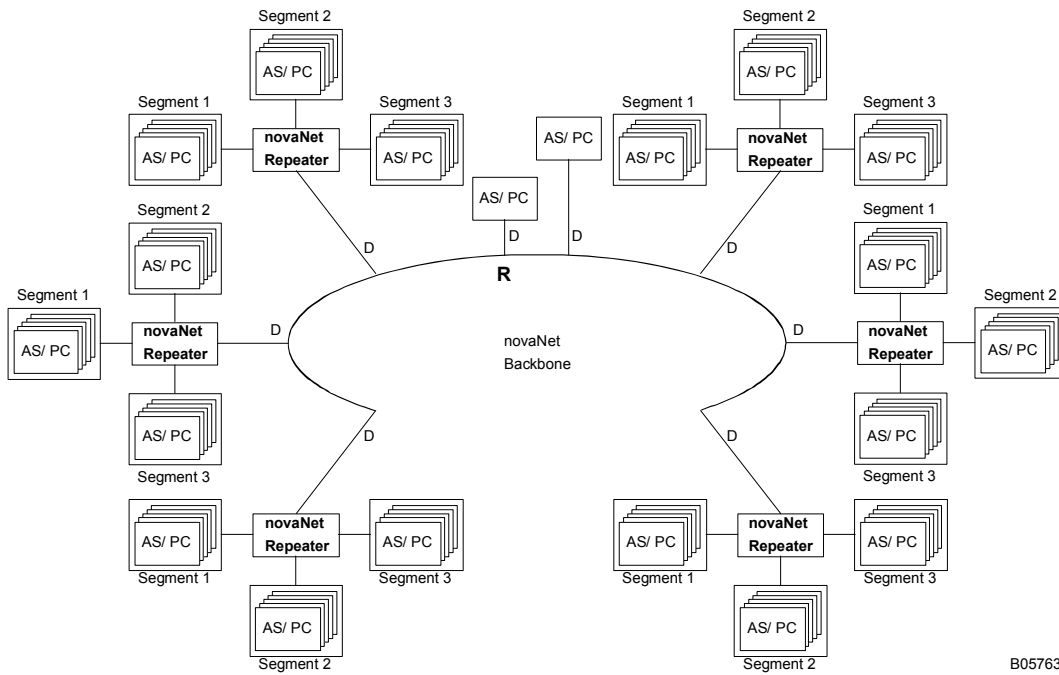


B05763a

The backbone consists of a "stem" or "trunk". Branches with one repeater each lead off from this "trunk". However, automation stations may also be connected directly. In the above example, the route travelled by each telegram between the most distant points only passes via two repeaters in each case. However, lengths "R"


plus all branches "D" taken together must not exceed the specification for the novaNet segment of 200 nF / 300 Ω. A novaNet network built up from segments of this sort consists of one single network in logical terms. It is also mandatory for all participants connected to this novaNet network to have a unique address.

**Dimension drawing**

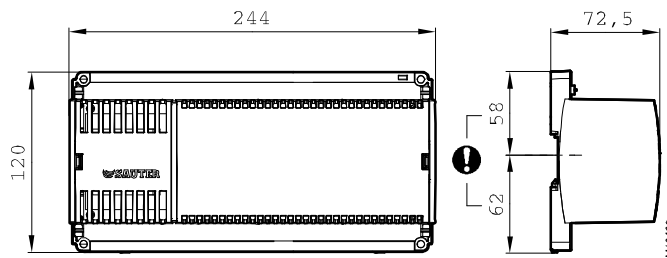

**Wiring diagram**

Note: When using the V24 interfaces (transmission via OWG), the parallel channel connection must not be assigned with copper cable, otherwise data collisions will occur.  
For longer distances, mono-mode is preferable on the OWG side.

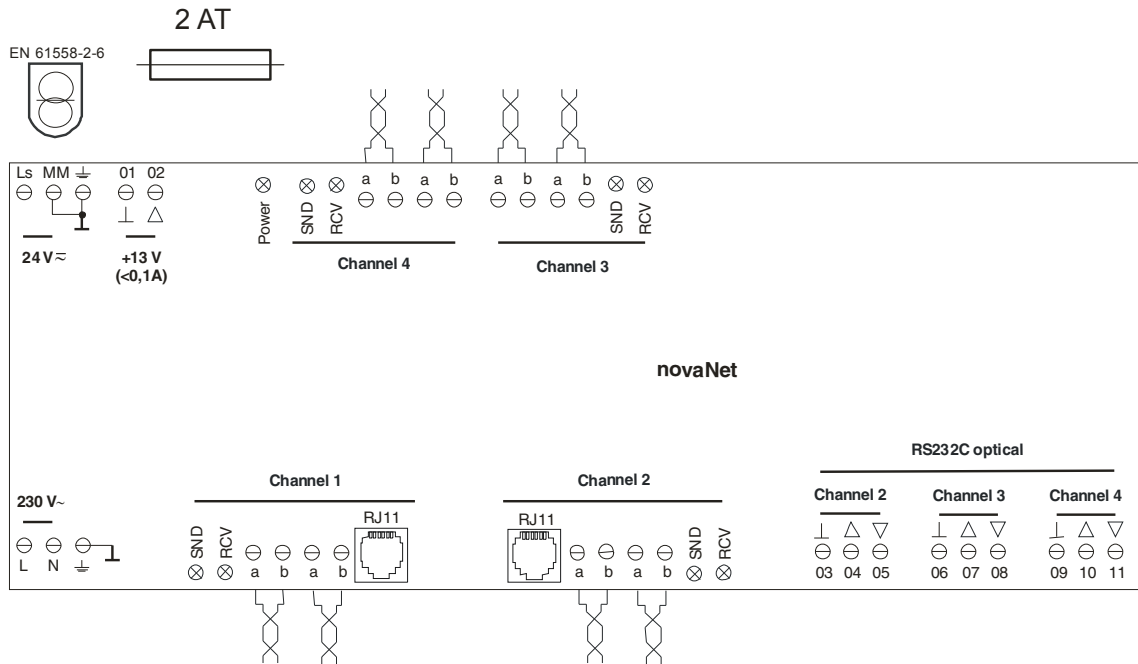

A 00542